


BA/MAG Switch Settings



BA/MAG Switch Settings			
	Function	OFF Position	ON Position
Switch 1	Security	Low Security	High Security
Switch 2	Bill Orientation	Two-way acceptance	One-way acceptance (green first)
Switch 3 (B units)	Pulse Pattern	Short Credit Pulse	Long Credit Pulse
Switch 3 (SA units)	Interface	Pulse/High Level Interface	Serial/Parallel Interface
Switch 4	Selective Accept	Inhibit \$20	Accept \$20
Switch 5		Inhibit \$10	Accept \$10
Switch 6		Inhibit \$5	Accept \$5
Switch 7		Inhibit \$2	Accept \$2
Switch 8		Inhibit \$1	Accept \$1

* MAG Bill Acceptors with software 67090 or 67126 will accept \$1 bills with option switches 4-8 off as default.

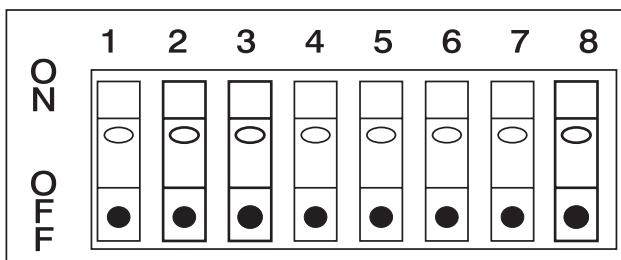

888.396.8363 - Atlanta

800.248.1712 - Orlando

www.vendorsrepair.com

V
R
S

T
E
C
H

T
I
P
S